




Henderson Storage Systems Henderson Rack Assembly Instructions

In assembling frames, the face of the beams, both front and rear, must face to the front of the unit.

CAUTION: Be sure to attach the "T" sections labeled 5" to the 5" beams and the 4" to the 4" beams.

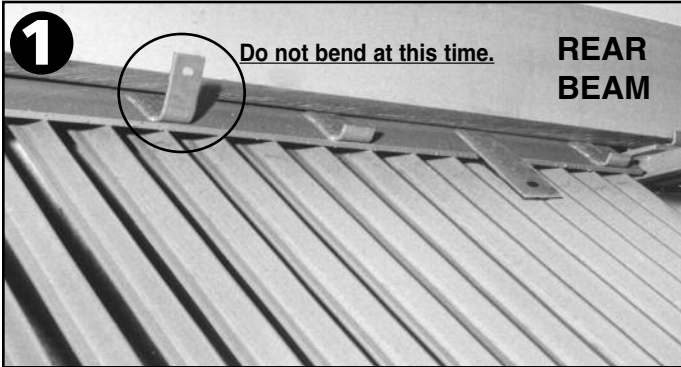


1. Attach storage sections to rear beam by lowering front of storage section allowing clips to hook on rear of beam; lift front of storage rack locking rear clips in place. Make sure your first storage rack is against both front and rear of frame, if not, be sure your frame is square. The reverse tabs (rear) will be bent into position (as circled above) after Step 5 is done.




2. Using three clamps, position front of storage section to the front beam at each tab location; THIS IS IMPORTANT! Check to see that clips are secure and fitting properly on the rear beam before proceeding to the next step.



3. Using a hammer, carefully bend tabs flush against front beam.

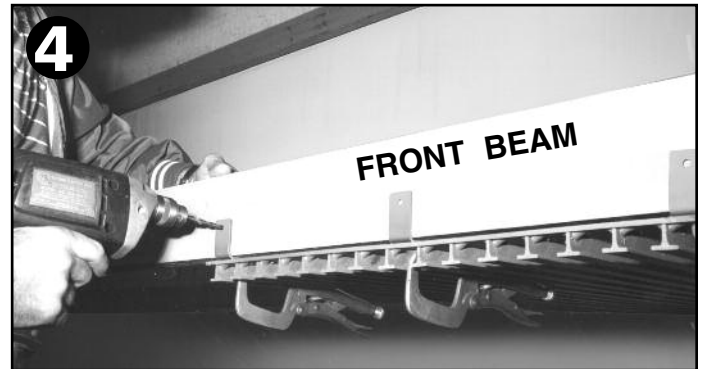

4. Drill holes in beam to match holes in tabs and reverse tabs.

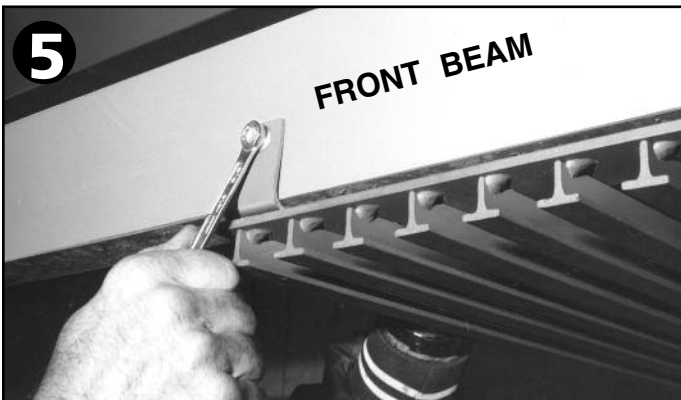

5. Secure tabs to frame with screws and remove clamps. Secure front tabs first, then proceed to bend, drill and attach rear (reverse) tabs. To bend reverse tabs up, use a prybar or crow bar. Then, drill and attach to rear beam with screws.



6. Continue adding sections following the previous steps. Remember to make sure the sections are together at both the front and the rear.

West

2041 Elm Court • Ontario, CA 91761
 Toll-Free: (800) 423-4478
 Toll-Free Fax Orders: (866) 786-2437

Southwest

2532 Converse Street • Dallas, TX 75207
 Toll-Free: (800) 262-4695
 Toll-Free Fax Orders: (800) 446-6651

Midwest

960 Industrial Drive • Elmhurst, IL 60126
 Toll-Free: (800) 334-7914
 Toll-Free Fax Orders: (800) 554-9124